

# TWO DOOR UNDERCOUNTER CHILLER

## **COREUC-125**










#### Details

- Grade 304 stainless steel interior and exterior
- · Ventilated cooling system
- Removable door gasket
- Free-welding process

- · 2 PVC coated grid shelves included
- · Integrated shelf guide
- Fits I x I/I GN container on each shelf (GN excluded)

## Option

· Doors can be replaced with drawers

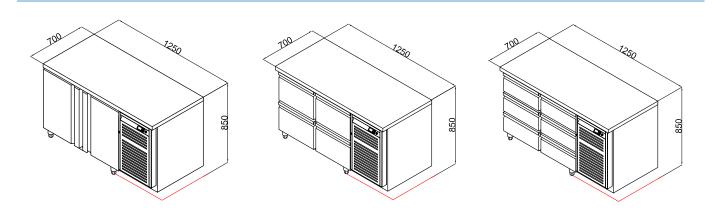

### **Specifications**

Model	Exterior Dimensions WxDxH (mm)	Capacity in Litres	Power (W)	Voltage Supply	Frequency (Hz)	Temperature Range (°C)	Refrigerant	Mode of Refrigeration
COREUC-125	1250×700×850	280	220	220~240V I IPH	50	0~+10	R290	Monoblock

Sofia Ref. LLC









